


Classic ESD Workbench 1500 x 700mm

KS1500700CLASSIC

Description

The Classic ESD Workbench is fully ESD and available in two in-stock sizes: 1500 x 700mm and 1800 x 900mm. Other sizes are available on request. The CLASSIC range includes an ESD safe workbench with an ESD light holder, ESD LED light, ESD cross bar, slotted ESD bench uprights, full length ESD laminate shelf, full length ESD louvre bin rail, ESD perforated panel, ESD power rail (6 switched UK single sockets), ESD cable management tray and ESD height adjustable legs with levelling feet. The Classic ESD Workbench is durable and can hold a maximum load capacity of 300KG UDL. The workbench comes complete with a manual height adjustment ranging from 680 – 1130mm. The Classic ESD Workbench has a high quality, high pressure, 25mm thick ESD laminate table top.

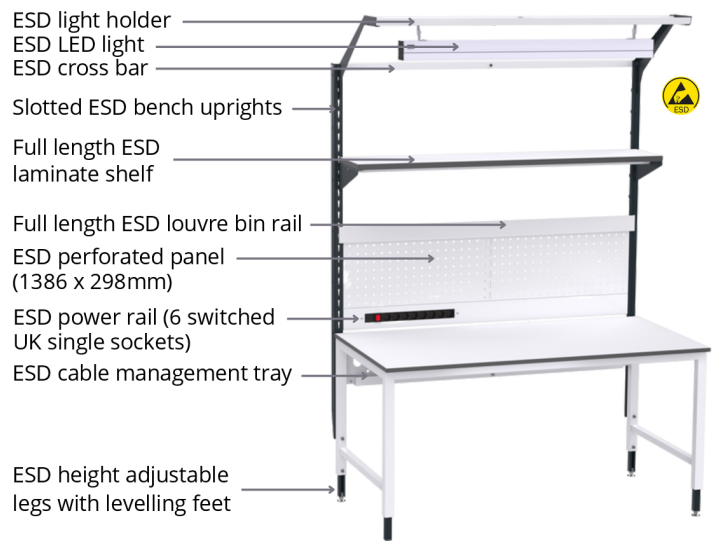

Technical Specification:

ESD safe workbench (1500 x 700mm)

All metal parts:-

Fully ESD powder coated paint (1x 10⁴-1x 10⁹ Ohm)

ESD table top:-

Material: High quality, high pressure, 25mm thick ESD laminate (1x 10⁴-1x 10⁹ Ohm)

Load capacity: 300kg UDL (Uniformly Distributed Load)

Dimensions: 1490 x 690 x 25mm

ESD safe workbench is fully ESD and all parts can be grounded via the 2 meter flying lead which is included

Manual height adjustment: 680 - 1130mm (with levelling feet)

Bench colour: Light grey RAL7035 (legs 7016 anthracite black)

Slotted ESD bench uprights:-

ESD powder coated paint

Colour: 7016 anthracite black

Full length ESD high quality high pressure 25mm thick laminate shelf:-

Load capacity: 50kg UDL (Uniformly Distributed Load)

Colour: Light grey RAL7035

Dimensions: 1442 x 300 x 25mm



Classic ESD Workbench 1500 x 700mm

KS1500700CLASSIC

Technical Specification:

ESD cross bar (length of table width: 1500mm):-
ESD powder coated paint
Max. load capacity: 10kg
Colour: Light grey RAL7035 (Sentential RAL 7016)

Fully ESD light holder and ESD LED light with aluminium case:-
Light directing systems: Micro prismatic optics
Power: 37,8-Watt
Luminous flux: 3822 Lumen, min. 1226 Lux at 1000mm
Colour temperature: 5000K
Colour rendering index: Ra >80
Endurance: 50.000 hours
Protection class: IP40
ESD LED light length: 1154mm
Power cord 4-meter GST connector and UK plug
Incl. fixing material for C-profile lamp holder, angle adjustment: +/- 60°

ESD perforated panel:-
ESD powder coated paint
Pattern: 10x10mm square holes
Distance: 38mm hole centre
Dimensions: 1386 x 298mm
Colour: Light grey RAL7035

Full length ESD louvre bin rail for bin attachment:-
ESD powder coated paint
Load capacity: 10kg

ESD power rail (1490mm) equipped with:-
ON/OFF switch, 6 UK single sockets, 2 meter flying lead with 13 amp UK plug.

Conformity: EN 61340-5-1, EN 311, D-s2, d0, EN 14322, EN 311, EN 312, EG 1907/2006 (REACH), FSC, PEFC

Warranty: 5 years on metal parts

Customised Workbench Solutions

Bondline offers a bespoke customisation service for ESD workbenches. Whether you would like a different bench or shelf size or specific workbench accessories, our team can help you design a bespoke ergonomic ESD workbench to suit your specifications. Please get in touch with our team by sending an email to sales@bondline.co.uk with your requirements.



Eliminate Costly Static Damage...

Whether you are experiencing unacceptable levels of damage in transit, need a specific cleanroom solution or simply don't know which ESD safe equipment is best for you, we can help!

Request complimentary,
no obligation advice by
speaking with one of
our technical experts
today.

