


# Classic ESD Workbench 1800 x 900mm

KS1800900CLASSIC

## Description

The Classic ESD Workbench is fully ESD and available in two in-stock sizes: 1500 x 700mm and 1800 x 900mm. Other sizes are available on request. The CLASSIC range includes an ESD safe workbench with an ESD light holder, ESD LED light, ESD cross bar, slotted ESD bench uprights, full length ESD laminate shelf, full length ESD louvre bin rail, ESD perforated panel, ESD power rail (6 switched UK single sockets), ESD cable management tray and ESD height adjustable legs with levelling feet. The Classic ESD Workbench is durable and can hold a maximum load capacity of 300KG UDL. The workbench comes complete with a manual height adjustment ranging from 680 – 1130mm. The Classic ESD Workbench has a high quality, high pressure, 25mm thick ESD laminate table top.

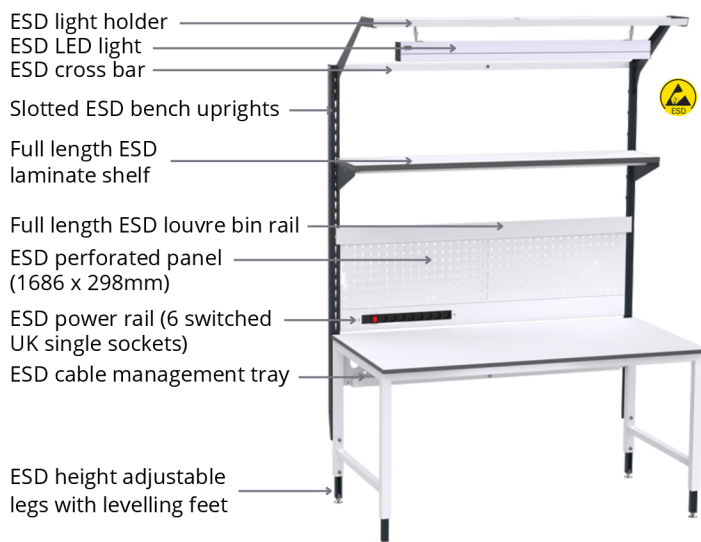

## Technical Specification:

ESD safe workbench (1800 x 900mm)

All metal parts:-

Fully ESD powder coated paint (1x 10<sup>4</sup>-1x 10<sup>9</sup> Ohm)

ESD table top:-

Material: High quality, high pressure, 25mm thick ESD laminate (1x 10<sup>4</sup>-1x 10<sup>9</sup> Ohm)

Load capacity: 300kg UDL (Uniformly Distributed Load)

Dimensions: 1790 x 890 x 25mm

ESD safe workbench is fully ESD and all parts can be grounded via the 2 meter flying lead which is included

Manual height adjustment: 680 - 1130mm (with levelling feet)

Bench colour: Light grey RAL7035 (legs 7016 anthracite black)

Slotted ESD bench uprights:-

ESD powder coated paint

Colour: 7016 anthracite black

Full length ESD high quality high pressure 25mm thick laminate shelf:-

Load capacity: 50kg UDL (Uniformly Distributed Load)

Colour: Light grey RAL7035

Dimensions: 1742 x 300 x 25mm



# Classic ESD Workbench 1800 x 900mm

KS1800900CLASSIC

## Technical Specification:

ESD cross bar (length of table width: 1800mm):-  
ESD powder coated paint  
Max. load capacity: 10kg  
Colour: Light grey RAL7035 (Sentential RAL 7016)

Fully ESD light holder and ESD LED light with aluminium case:-  
Light directing systems: Micro prismatic optics  
Power: 37,8-Watt  
Luminous flux: 3822 Lumen, min. 1226 Lux at 1000mm  
Colour temperature: 5000K  
Colour rendering index: Ra >80  
Endurance: 50.000 hours  
Protection class: IP40  
ESD LED light length: 1440mm  
Power cord 4-meter GST connector and UK plug  
Incl. fixing material for C-profile lamp holder, angle adjustment: -/+ 60°

ESD perforated panel:-  
ESD powder coated paint  
Pattern: 10x10mm square holes  
Distance: 38mm hole centre  
Dimensions: 1686 x 298mm  
Colour: Light grey RAL7035

Full length ESD louvre bin rail for bin attachment:-  
ESD powder coated paint  
Load capacity: 10kg

ESD power rail (1790mm) equipped with:-  
ON/OFF switch, 6 UK single sockets, 2 meter flying lead with 13 amp UK plug.

Conformity: EN 61340-5-1, EN 311, D-s2, d0, EN 14322, EN 311, EN 312, EG 1907/2006 (REACH), FSC, PEFC

Warranty: 5 years on metal parts

## Customised Workbench Solutions

Bondline offers a bespoke customisation service for ESD workbenches. Whether you would like a different bench or shelf size or specific workbench accessories, our team can help you design a bespoke ergonomic ESD workbench to suit your specifications. Please get in touch with our team by sending an email to [sales@bondline.co.uk](mailto:sales@bondline.co.uk) with your requirements.



# Eliminate Costly Static Damage...

Whether you are experiencing unacceptable levels of damage in transit, need a specific cleanroom solution or simply don't know which ESD safe equipment is best for you, we can help!

Request complimentary,  
no obligation advice by  
speaking with one of  
our technical experts  
today.

